

# SCG CERAMICS PUBLIC COMPANY LIMITED

1 SIAM CEMENT RD., BANGSUE, BANGKOK 10800, THAILAND. www.cotto.com

COTTO STUDIO / SCG EXPERIENCE 1444 PRADITMANUTHAM RD., KLONGJAN, BANGKAPI, BANGKOK 10240

T: 66 (0) 2101 9922

F: 66 (0) 2101 9933 E:contact@scg.com

COTTO STUDIO PHUKET 1/6-8 DIBUK RD., TALADYAI,

MUANG, PHUKET 83000 T: 66 (0) 7621 7888 F: 66 (0) 7621 7886

E: cottopkt@scg.com

COTTO STUDIO CHIANGMAI

43/5-8 MODA PLACE, NIMMANHEYMIN SOI 7, SUTHEP,

MUANG, CHIANGMAI 50200

T: 66 (0) 5322 6726

F: 66 (0) 5322 6727 E: cottochm@scg.com

Certified Management System ISO 9001:2000 ISO 14001:2004

15.03.2018 02 Best Selection2018

\* Color of tiles in this print may vary slightly due to the printing process. Final color selection should be made from tile samples. \* The detail information in this print may be modified or updated by the company without prior notice.



# Best Selection 2018













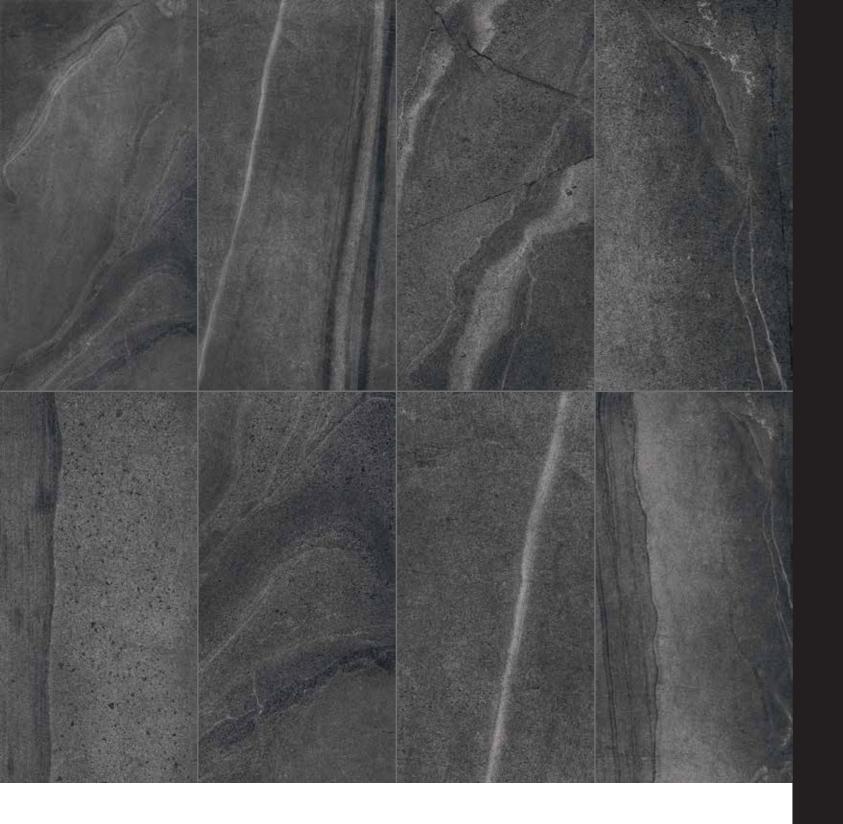

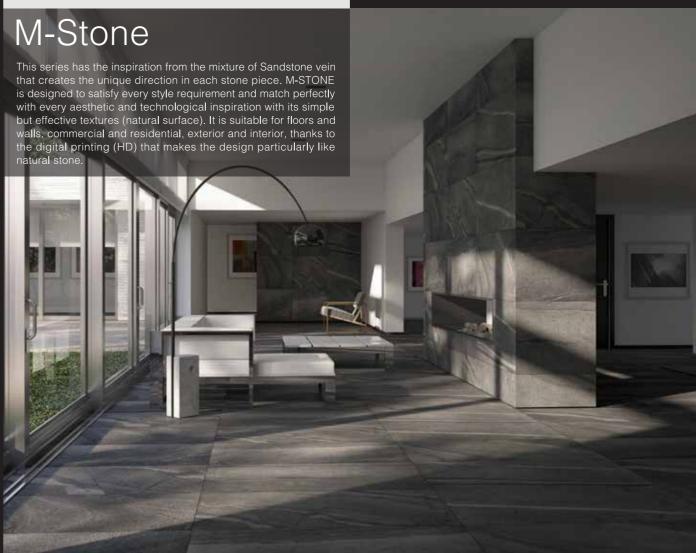


# M-Stone

Glazed Porcelain Surface : matt Rectified



M-Stone Series








Available in size 600x1,200 mm./600x600 mm./300x600 mm.

600x1,200 mm. 600x600 mm.

R<sub>10</sub> R<sub>11</sub>

300x600 mm.

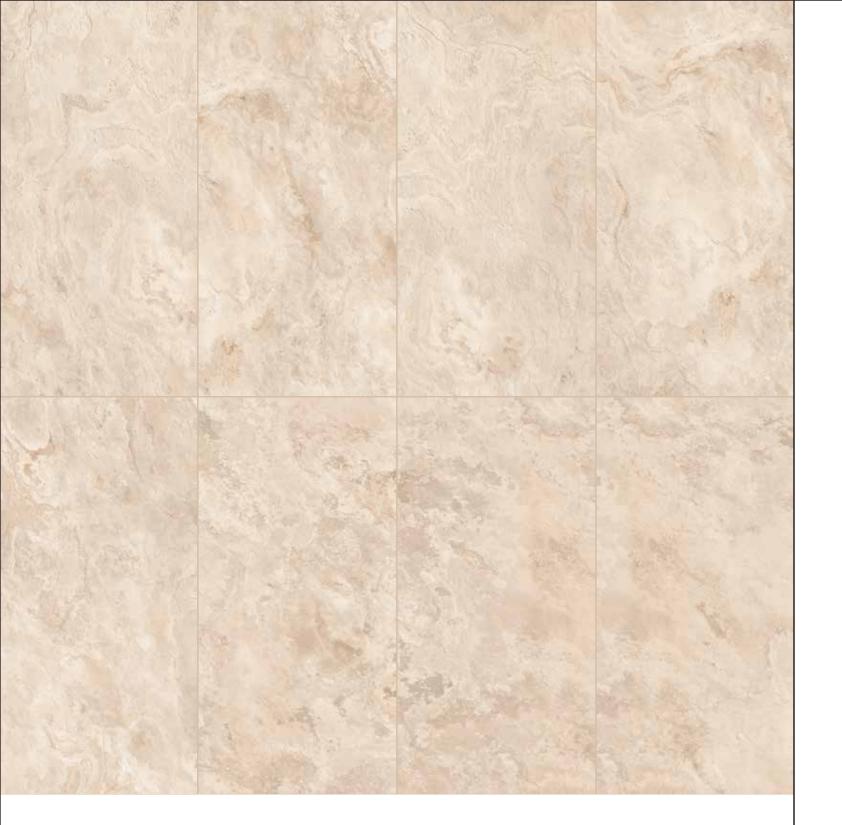



# Sassi Di Matera

Glazed Porcelain Surface : matt Rectified



Matera Stone Series







Grigio


Available in size 600x1,200 mm./600x600 mm./300x600 mm.


600x1,200 mm.

600x600 mm.


R<sub>0</sub>



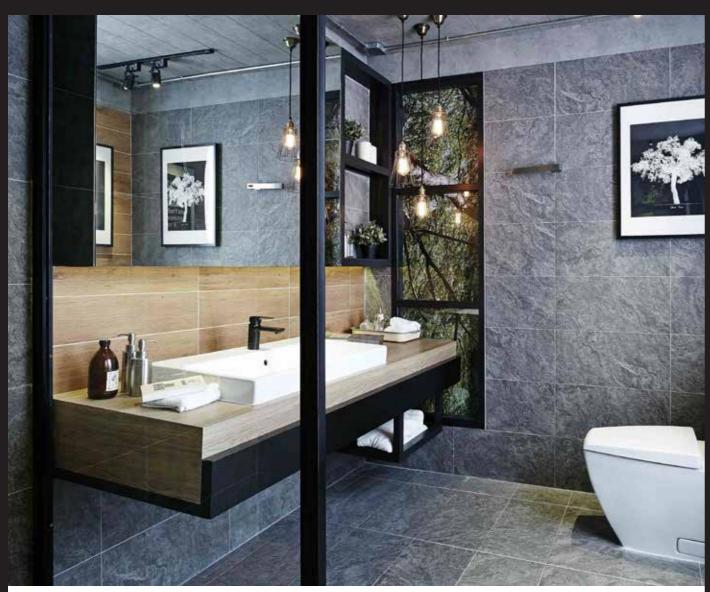

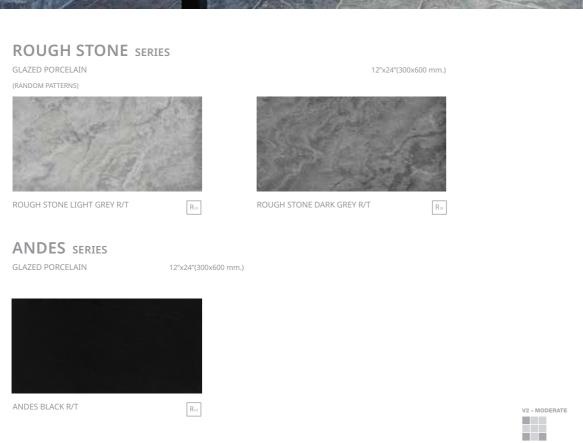




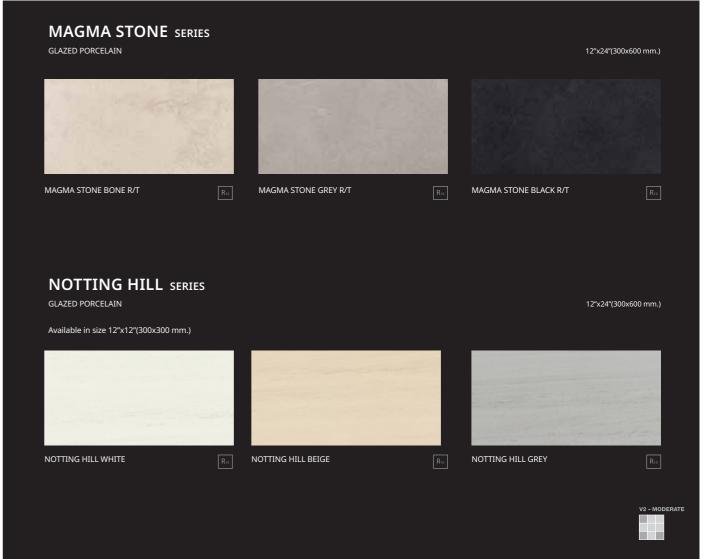





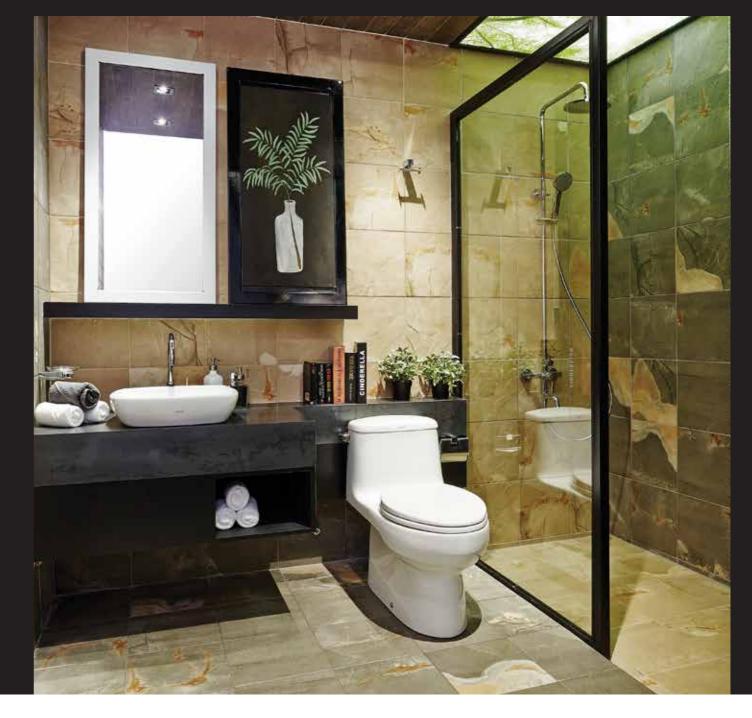

#### HIDEAWAY ALPINE SERIES

GLAZED PORCELAIN (RANDOM PATTERNS) Available in size 24"x48"(600x1,200 mm.)



HIDEAWAY ALPINE LT GREY R/T

24"x24"(600x600 mm.)



HIDEAWAY ALPINE GREY R/T



#### SLATE RESORT SERIES

GLAZED PORCELAIN



SLATE RESORT BEIGE





SLATE RESORT GREY





SAND SPA GREY

SAND SPA SERIES

GLAZED PORCELAIN

(RANDOM PATTERNS)




12"x12"(300x300 mm.)


SAND SPA BEIGE





COTTO

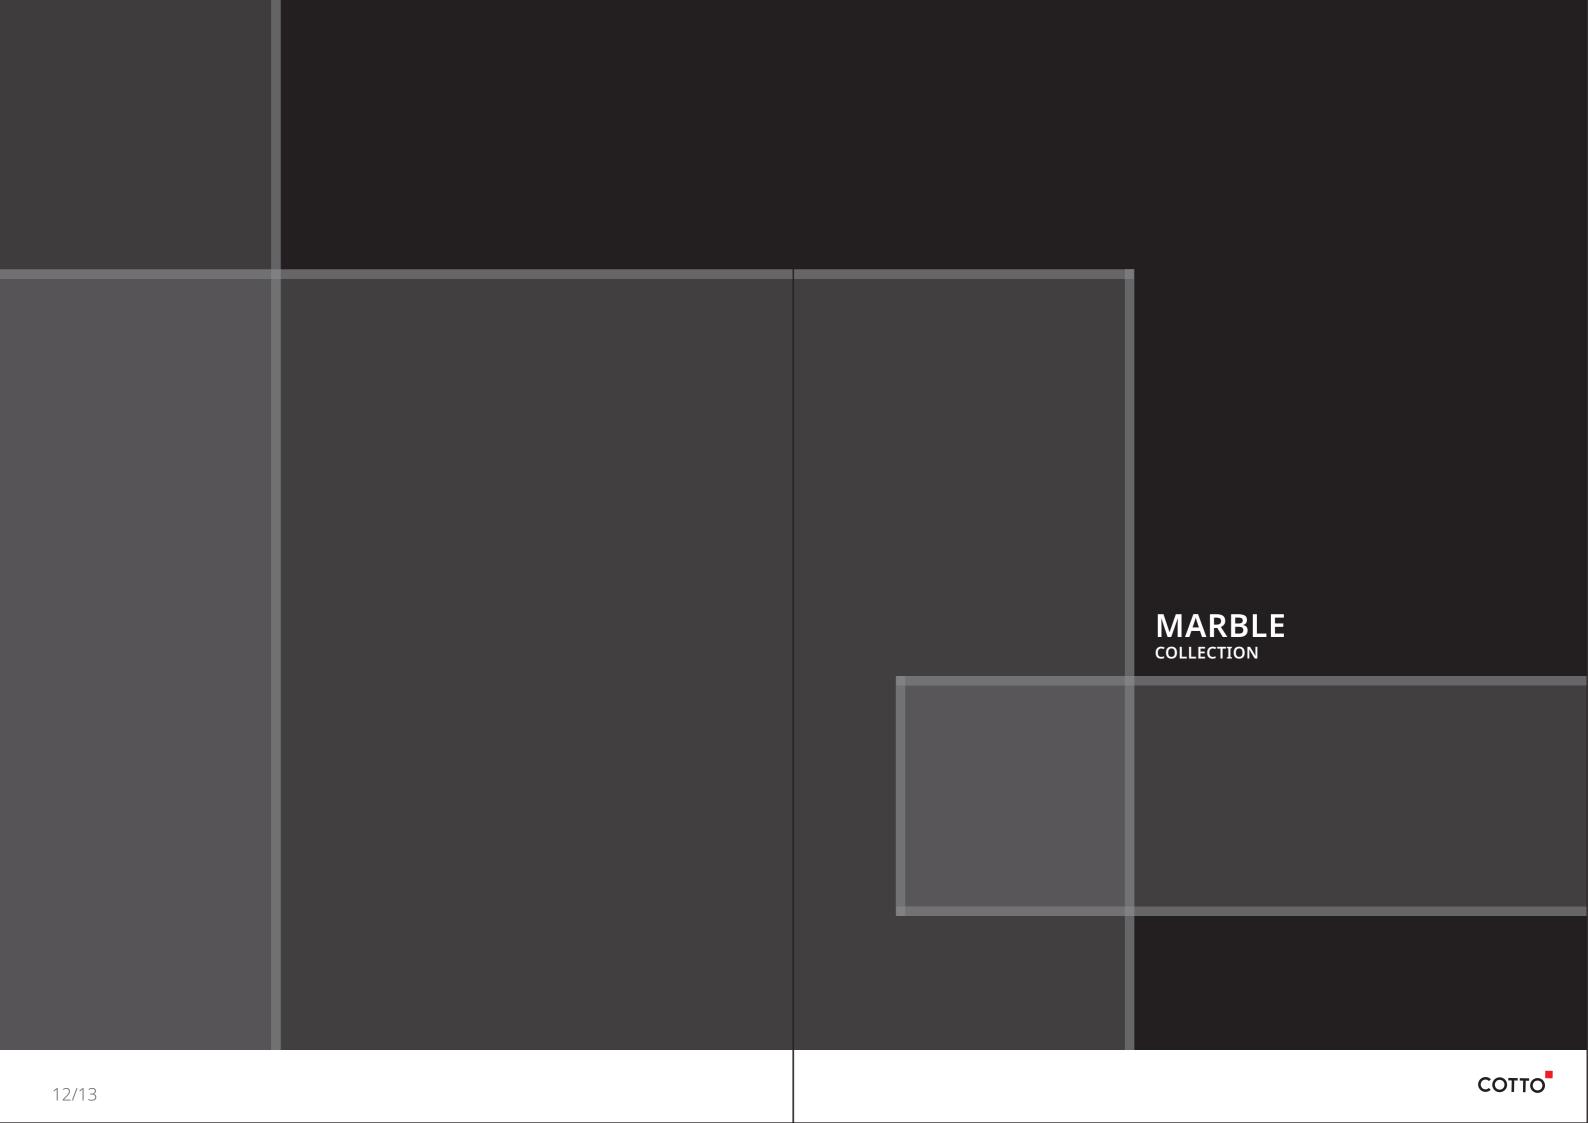

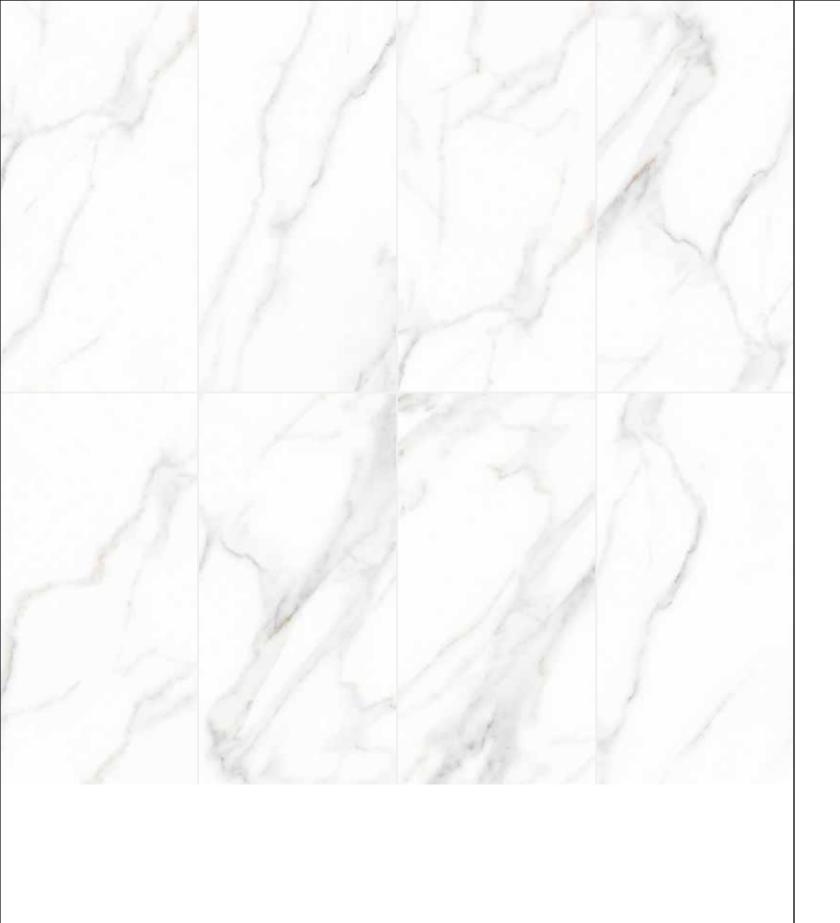



# Calacatta Classico

Glazed Porcelain Surface : satin Rectified

V2 - MODERATE

Calacatta Classiso Series



White

Available in size 600x1,200 mm./600x600 mm./300x600 mm.

600x1,200 mm.

600x600 mm.


R<sub>0</sub>

R<sub>0</sub>

R<sub>0</sub>

R<sub>0</sub>



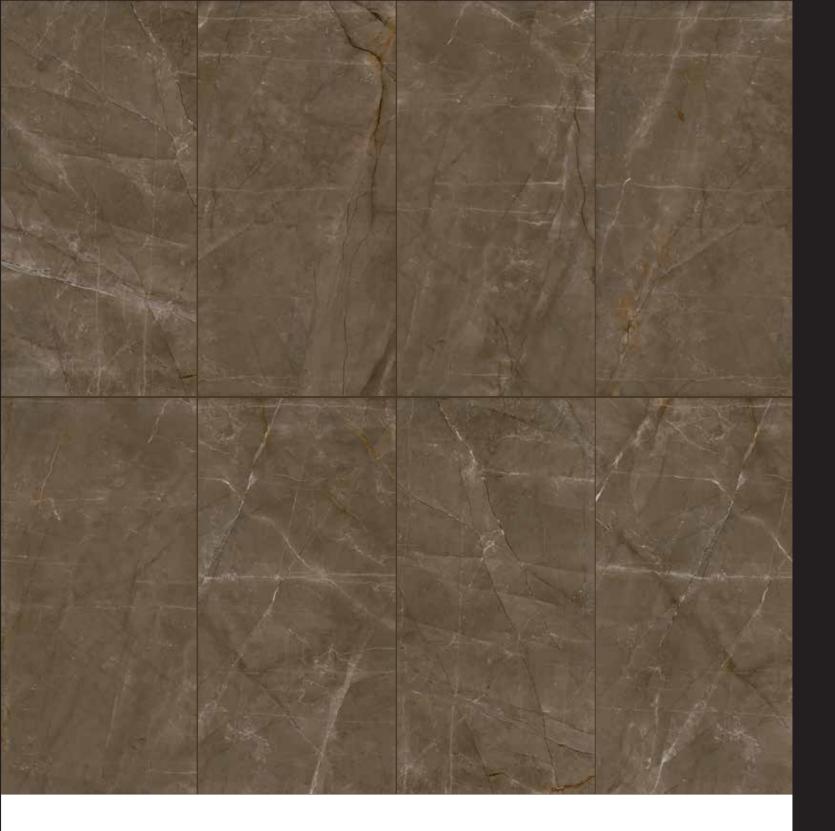



# Marmi Senza Tempo

Glazed Porcelain Surface : satin Rectified



Armani Series





Bronze


Available in size 600x1,200 mm./600x600 mm.

600x1,200 mm.

600x600 mm.

Ro

R<sub>9</sub>

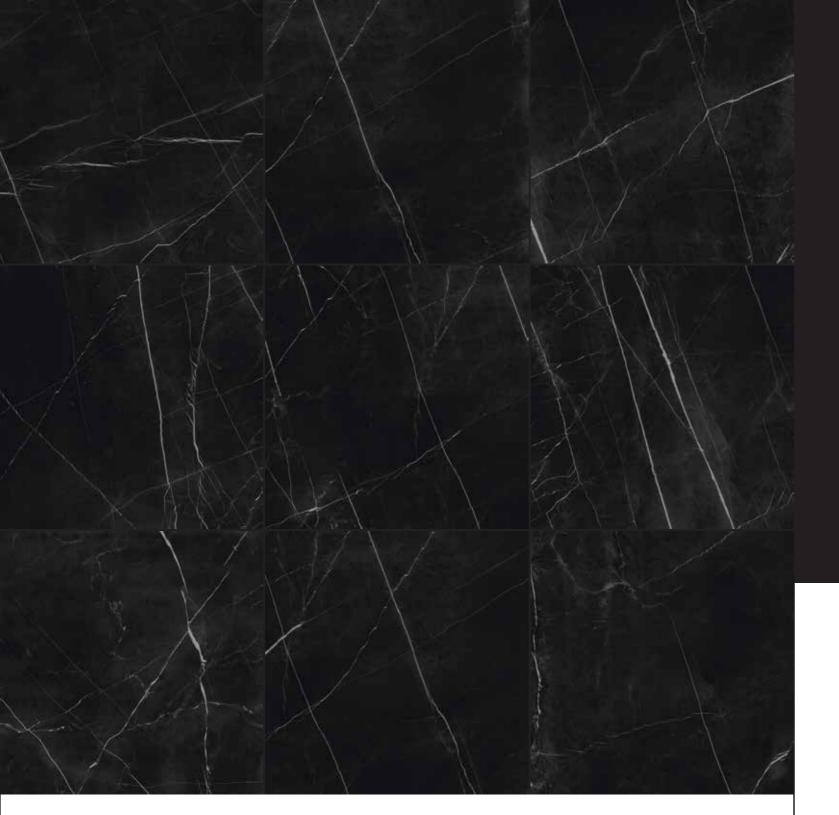



# Marmi Senza Tempo

Glazed Porcelain Surface : satin Rectified







Available in size 600x1,200 mm./600x600 mm.

600x1,200 mm.

600x600 mm.

#### NOBLE SERIES

GLAZED PORCELAIN (RANDOM PATTERNS)

12"x24"(300x600 mm.)



NOBLE BLACK R/T


#### MARMORO SERIES


GLAZED PORCELAIN 12"x12"(300x300 mm.)



MARMORO WHITE



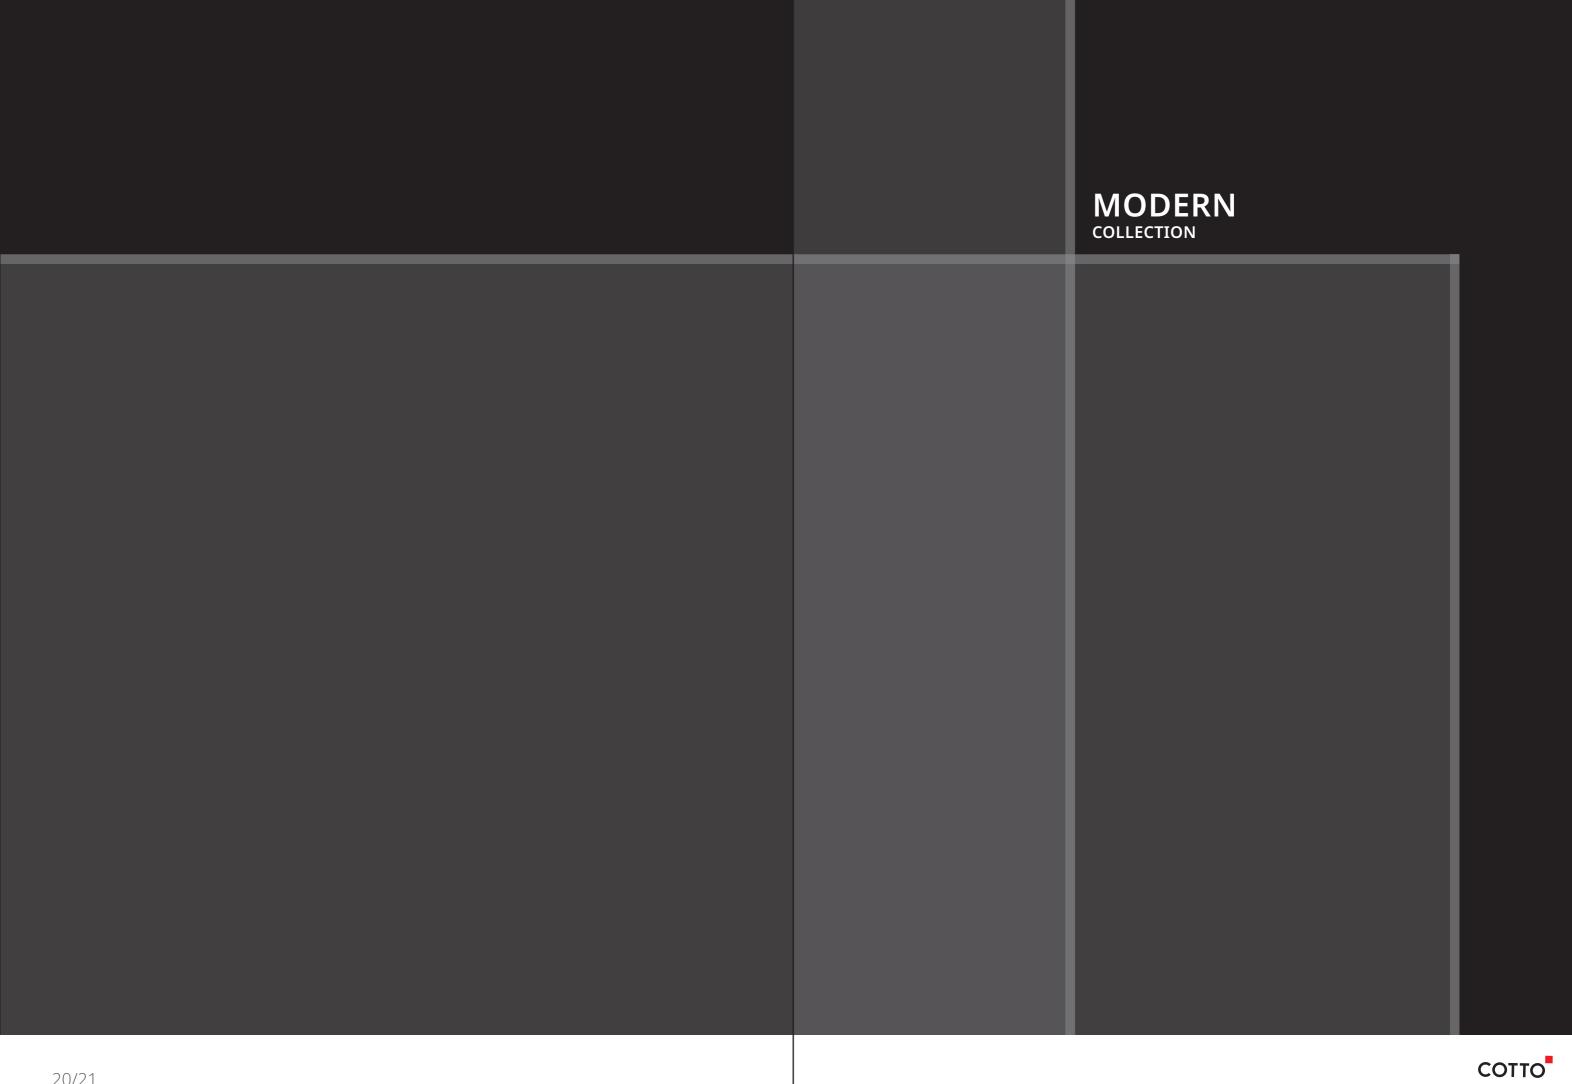

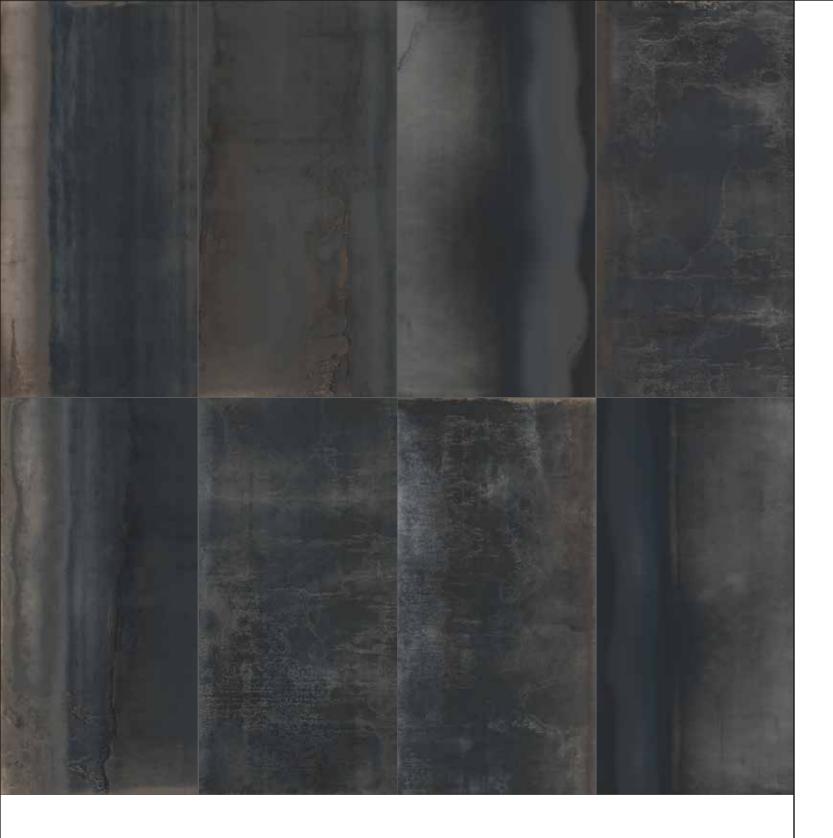










24"x48"(600x1,200 mm.)

**BETON** SERIES



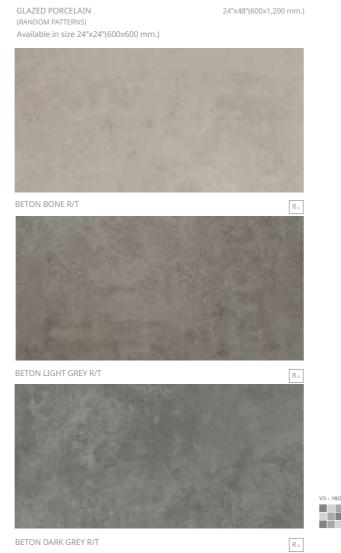

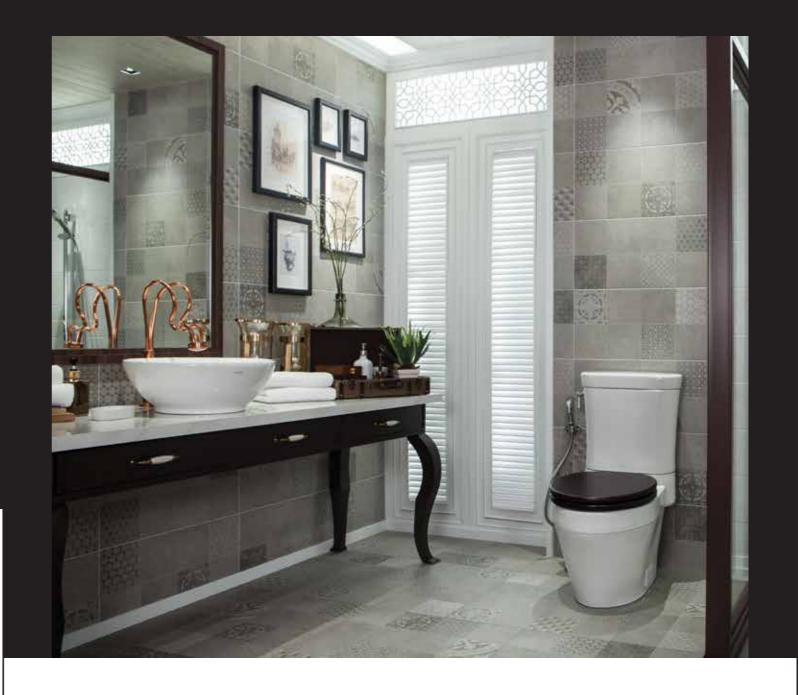

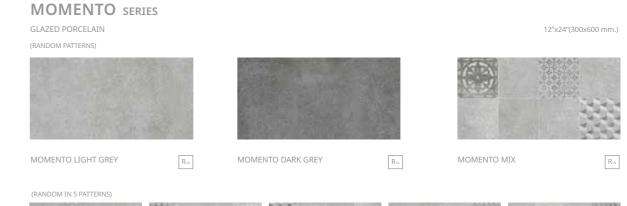












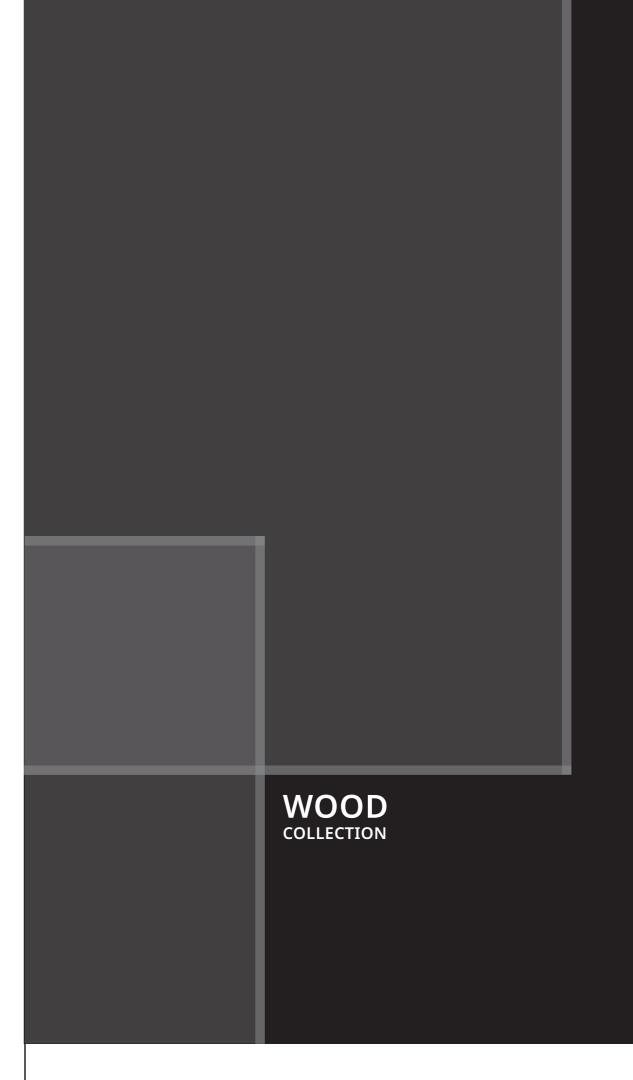

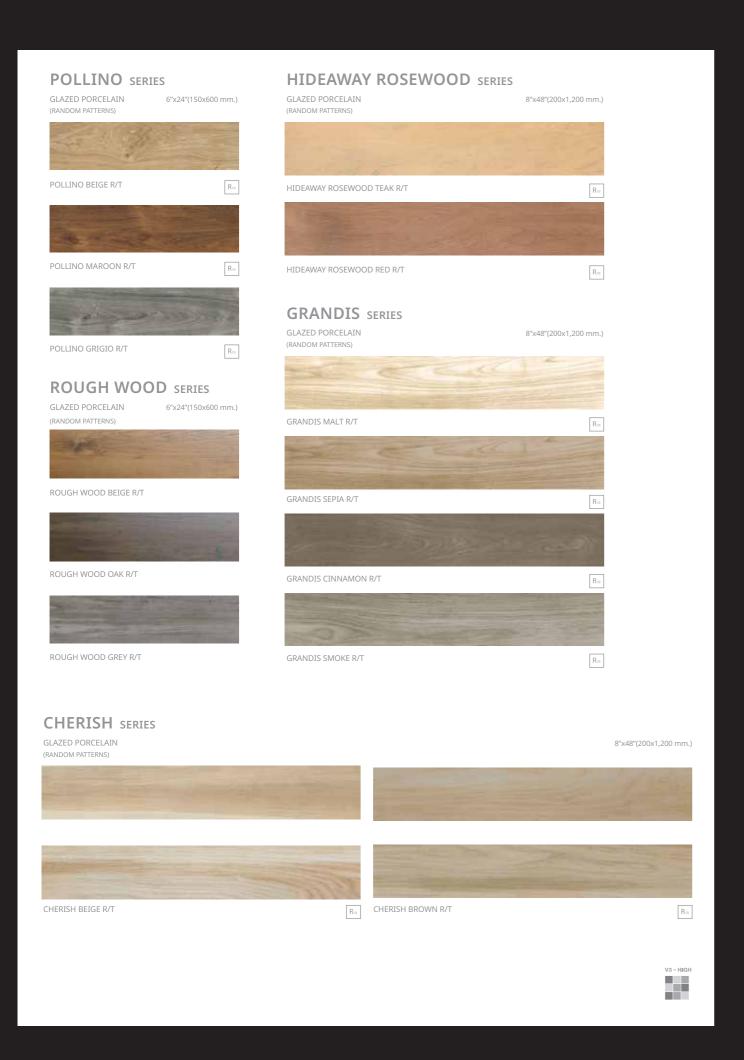

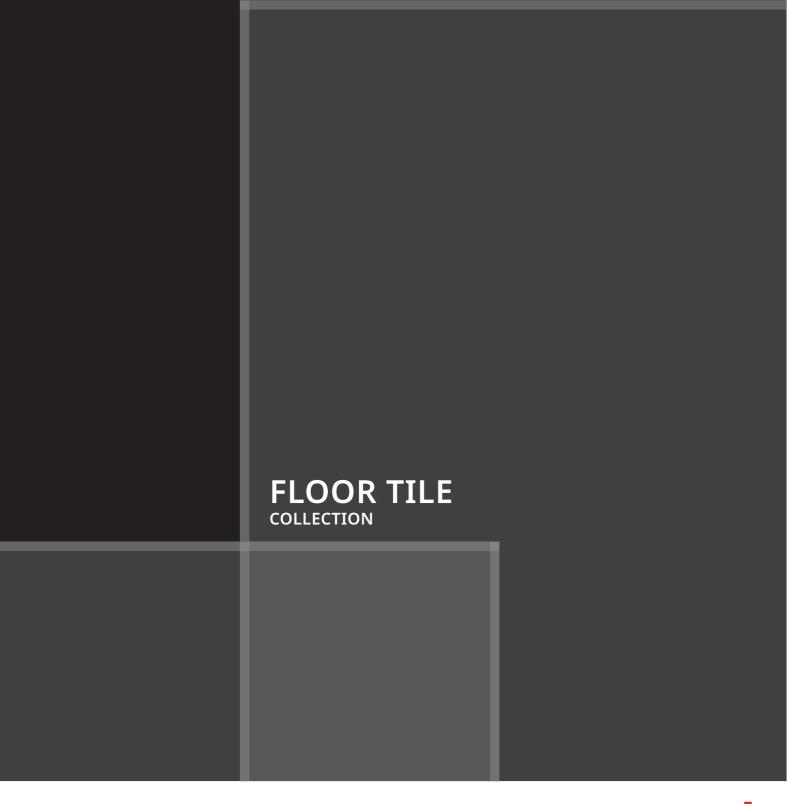





#### CHATREE WOOD SERIES

FLOOR TILE

CHATREE WOOD GOLDEN BROWN

#### COUNTRY WOOD SERIES FLOOR TILE

COUNTRY WOOD LIGHT BROWN

#### **ARCH WOOD SERIES**

FLOOR TILE



ARCH WOOD BEIGE

12"x24"(300x600 mm.)



Ro CHATREE WOOD RED BROWN 12"x24"(300x600 mm.)

R<sub>10</sub>

COUNTRY WOOD DARK BROWN

12"x24"(300x600 mm.)

R<sub>10</sub>

ARCH WOOD LIGHT GREY

MOLVENA SERIES



MOLVENA BEIGE



R<sub>10</sub>

MOLVENA GREY



#### COSMOS STONE SERIES

FLOOR TILE

12"x24"(300x600 mm.)




COSMOS STONE BEIGE



COSMOS STONE GREY



COSMOS STONE MIX BEIGE



COSMOS STONE MIX GREY





VILLE BEIGE





16"x16"(400x400 mm.)

FLOOR TILE 16"x16"(400x400 mm.)

TCM-130 SERIES

TCM-130 LILY







**GROOVEN** SERIES

FLOOR TILE 12"x12" (300x300 mm.)

GROOVEN BROWN R9



JASPER SERIES

JASPER GLOSS WHITE R<sub>9</sub>

12"x12" (300x300 mm.)



LALIN SERIES FLOOR TILE 12"x12" (300x300 mm.)















## **VEGA** SERIES FLOOR TILE

**BELLITA** SERIES

FLOOR TILE

BELLITA ASH

FLOOR TILE

VENTO BEIGE

**VENTO** SERIES

Ro





Ro



VENTO IVORY

Ro

12"x12" (300x300 mm.)

BELLITA CHARCOAL Ro



VENTO LIGHT GREY R<sub>9</sub>





VENTO DARK GREY R<sub>0</sub>


















#### GLOSS WHITE SERIES


WALL TILE

8"x8"(200x200 mm.) 8"x10"(200x250 mm.)

8"x12"(200x300 mm.) 10"x16"(250x400 mm.)



GLOSS WHITE



GLOSS WHITE



GLOSS WHITE



GLOSS WHITE






TENDER WHITE



FRESCO SERIES

WALL TILE



FRESCO WHITE



FRESCO GREY



FRESCO LINE

8"x24"(200x600 mm.)

**SACRAMENTO** SERIES

WALL TILE



SACRAMENTO WHITE


SACRAMENTO GREY



ENGLISH GARDEN SERIES

WALL TILE

12"x18"(300x450 mm.)



ENGLISH GARDEN WHITE

**BONGO** SERIES

WALL TILE 12"x18"(300x450 mm.)



BONGO WHITE

GRAND CALCUTTA SERIES WALL TILE 12"x18"(300x450 mm.)



GRAND CALCUTTA WHITE

#### JASMINE SERIES

WALL TILE

12"x24"(300x600 mm.)



JASMIN GLOSS WHITE R/T

#### MARMORO SERIES

WALL TILE

12"x24"(300x600 mm.)



MARMORO WHITE R/T

#### GRAND CALCUTTA SERIES

WALL TILE 12"x24"(300x600 mm.)



GRAND CALCUTTA WHITE R/T





#### **BUCKINGHAM** SERIES

WALL TILE



BUCKINGHAM (HYG)

8"x24"(200x600 mm.)



BUCKINGHAM NEO (HYG)

LUXE SERIES

WALL TILE

10"x16"(250x400 mm.)

LUXE GOLD



#### ROME SERIES

WALL TILE



ROME

10"x16"(250x400 mm.)

ROME TWILL


### **RAVENNA** SERIES

WALL TILE 10"x16"(250x400 mm.)



RAVENNA BEIGE



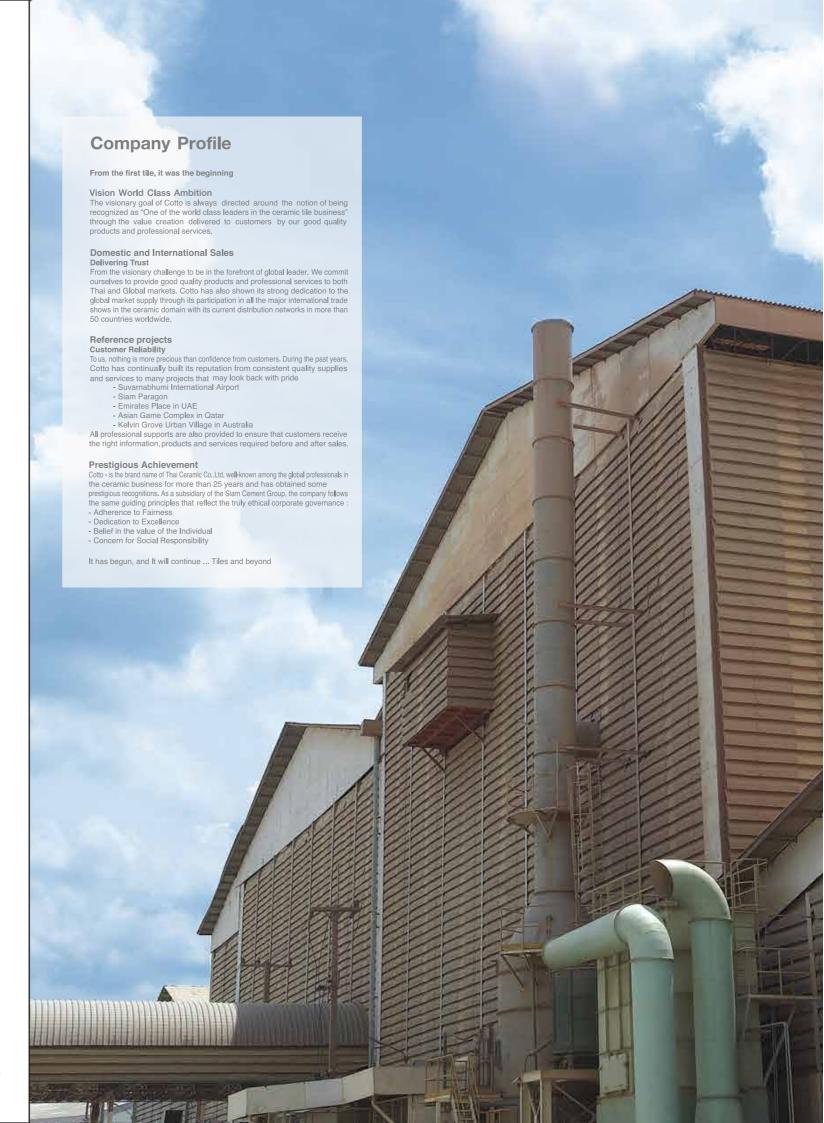

LUXE SILVER

#### TECHNICAL SPECIFICATIONS:

FLOOR TILE, GLAZED PORCELAIN, HOMOGENEOUS TILE

Characteristics	Standards	TCC Specifications							
Characteristics	Standards	FLOOR TILE	GLAZED PORCELAIN	HOMOGENEOUS TILE					
Product classification	ISO 13006 / TIS 2508-2555 (2012)	Group Blla	Group Bla	Group Bla					
Water absorption	ISO 10545-3	3.0 % < E ≤ 6.0 %	E ≤ 0.5 %	E≤0.5 %					
Modulus of rupture	ISO 10545-4	≥ 22 N/mm²	≥ 35 N/mm²	≥ 35 N/mm²					
Breaking strength, Thickness ≥ 7.5 mm.	ISO 10545-4	≥ 1000 N	≥ 1300 N	≥ 1300 N					
Breaking strength, Thickness < 7.5 mm.	ISO 10545-4	≥ 600 N	≥ 700 N	≥ 700 N					
Chemical resistance, low concentrate acids and alkalis	100 100 10	Minimum class GLB	Minimum dass GLB	Minimum class ULB					
Chemical resistance, household and swimming pool salts	ISO 10545-13	Minimum class GB	Minimum class GB	Minimum class UB					
Staining resistance	ISO 10545-14	Minimum class 3	Minimum class 3	-					
Dimension and surface quality									
Length and Width	] [	± 0.6%	± 0.6%	± 0.6%					
Thickness	] [	± 5.0%	± 5.0%	± 5.0%					
Straightness of sides	1 100 105 15 0	± 0.5%	± 0.5%	± 0.5%					
Rectangularity	- ISO 10545-2	± 0.6%	± 0.6%	± 0.6%					
Centre curvature	] [	± 0.5%	± 0.5%	± 0.5%					
Edge curvature	] [	± 0.5%	± 0.5%	± 0.5%					
Warpage	] [	± 0.5%	± 0.5%	± 0.5%					
Crazing resistance	ISO 10545-11	Resisted	Resisted	-					
Abrasion resistance of surface (glazed tile) or PEI	ISO 10545-7	Minimum class 2	Minimum class 2	-					
Abrasion resistance of deep (unglazed tile)	ISO 10545-6	-	-	Maximum 175 mm <sup>3</sup>					
Slip resistance (R-test)	AS / NZS 4586	Required	Required	Required					

<sup>\*</sup>Our products also meet EN standard and ASTM standard. Test results are available upon request.

#### TECHNICAL SPECIFICATIONS:

WALL TILE

Characteristics	Standards	TCC Specifications
Characteristics	Standards	TCC Specifications  WALL TILE  Group BIII  E > 10.0 %  ≥ 15 N/mm²  ≥ 600 N  ≥ 200 N  Minimum class GLB  Minimum class GB  4 0.5%  ± 10.0%  ± 0.3%  ± 0.5%  + 0.5%  - 0.3%  ± 0.5%  Resisted
Product classification	ISO 13006 / TIS 2508-2555 (2012)	Group BIII
Water absorption	ISO 10545-3	E > 10.0 %
Modulus of rupture	ISO 10545-4	≥ 15 N/mm²
Breaking strength, Thickness ≥ 7.5 mm.	ISO 10545-4	≥ 600 N
Breaking strength, Thickness < 7.5 mm.	ISO 10545-4	≥ 200 N
Chemical resistance, low concentrate acids and alkalis	100 40545 40	Minimum class GLB
Chemical resistance, household and swimming pool salts	ISO 10545-13	Minimum class GB
Staining resistance	ISO 10545-14	Minimum class 3
Dimension and surface quality ( non-spacer)		
Length and Width		± 0.5%
Thickness	[	± 10.0%
Straightness of sides		± 0.3%
Rectangularity	ISO 10545-2	± 0.5%
Centre curvature		+ 0.5%
Certile curvature	J	- 0.3%
Edge curvature	] [	+ 0.5%
Euge curvature		- 0.3%
Warpage		± 0.5%
Crazing resistance	ISO 10545-11	Resisted

<sup>\*</sup>Our products also meet EN standard and ASTM standard. Test results are available upon request.

Classification (R Value)	Using Area Suggestion
R9	Internal domestic & commercial use, Public buildings, Internal ramps (Dry)
R10	External walkways
R11	External ramps, External walkways, Internal step tread, Swimming pool surrounds
R12	External ramps, Swimming pool surrounds, Communal showers
R13	External ramps, Step tread (Wet)

	SHADE V	ARIATION											
DEGREE OF COLOUR CHANGE / Degree of variation in the shade and/or in the colour between the various parts of the laid product: Minimum V1, Maxximum V4.													
VI-LOW SHADE VARIATION	V2-MODERATE SHADE VARIATION	V3-HIGH SHADE VARIATION	V4-RANDOM SHADE VARIATION										
The least amount of shade and texture variation. Attainable in naturally fired clay products.	Light to moderate shade and texture variation with each carton.	High shade texture variation with each carton.	Very high shade and texture variation within each carton.										

#### PACKING SPECIFICATION: HOMOGENEOUS TILE

#### STANDARD PALLET 105x105 cm.

		NON	IINAL SIZE	THICKNESS	PAL	LET			PACKING			SQ.M.					WEIGHT			
PROD.	TYPE	INCH	MM.	MM.	CTN./	LAYER/	PCS./CTN.	CTN./PLT.	PCS./SQ.M.	CTN./SQ.M.	PLT./20'FCL	SQ.M./PC	SQ.M./CTN.	SQ.M./PLT.	SQ.M./20'FCL	NW/CTN.	GW/PLT.	NW/20'FCL		
					LAYER	PLT.	(PCS.)	(CTN.)	(PCS.)	(CTN.)	(PLT.)	(SQ.M.)	(SQ.M.)	(SQ.M.)	(SQ.M.)	(KGS.)	(KGS.)	(KGS.)		
EOUS TILE	7.	12x24	300 x 600	9.0±0.4	16	3	6	48	6.00	1.00	19	0.167	1.00	48.00	912	22.50	1,110	21,090		
НОМОБЕМ	PG	24x24	600 x 600	9.0±0.3	40	1	4	40	2.78	1.44	22	0.360	1.44	57.60	950	22.70	938	20,636		

#### **PACKING SPECIFICATION: GLAZED PORCELAIN**

#### STANDARD PALLET 105X105 CM.

			NOMINAL SIZE	THICKNESS	PAL	LET		PACKING			so	Q.M.				REMARKS	
PROD.	TYPE	INCH	MM.	MM.	CTN./	LAYER/	PCS./CTN.	CTN./PLT.	PLT./20'FCL	SQ.M./PC	SQ.M./CTN.	SQ.M./PLT.	SQ.M./20'FCL	NW/CTN.	GW/PLT.	NW/20'FCL	Ī
					LAYER	PLT.	(PCS.)	(CTN.)	(PLT.)	(SQ.M.)	(SQ.M.)	(SQ.M.)	(SQ.M.)	(KGS.)	(KGS.)	(KGS.)	
Z Z		6x24	150 x 600	10.0±0.4	12	5	11	60	15	0.091	1.00	60.00	900	23.00	1,410	21,150	
CEL		12x12	300 x 300	7.4±0.3	36	2	11	72	17	0.091	1.00	72.00	1,224	16.10	1,189	20,142	
- A	J. E.C.	12x24	300 x 600	10.0±0.4	16	3	8	48	13	0.180	1.44	69.12	898.56	31.50	1,542	20,046	Non-R/T
ZED		12x24	300 x 600	10.0±0.4	16	3	8	48	13	0.180	1.44	69.12	898.56	31.50	1,542	20,046	R/T
ਡੇ		24x24	600 x 600	10.0±0.4	36	1	3	36	23	0.36	1.08	38.88	933.12	24.00	1,182	21,276	

#### STANDARD PALLET 70X127 CM.

			N	IOMINAL SIZE	Thickness	Thickness PALLET				PA	CKING			SQ	М.		WEIG			
PR	DD. 1	TYPE	INCH	MM.	MM.	CTN/	LAYER/	PCS/CTN	CTN/PLT	LAYER	PLT/20'FCL	SQM/PC	SQM/CTN	SQM/PLT	SQM/20'FC	NW/CTN	GW/PLT	PC/SQM	CTN/SQM	NW/FC
						LAYER	PLT	(PCS.)	(CTN.)	PLT/20' FCL	(PLT.)	(SQM.)	(SQM.)	(SQM.)	(SQM.)	(KGS)	(KGS.)	(PC)	(CTN)	(KGS)
	,   ,	IELD	8X48	200 x 1,200	10.0±0.4	14	3	4	42	2	22	0.240	0.96	40.32	887	21.60	937	4.17	1.04	20,614
	'   '	IELD	24X48	600 x 1,200	10.0±0.4	22	1	2	22	2	26	0.720	1.44	31.68	824	32.00	734	1.39	0.69	19,084

#### PACKING SPECIFICATION: FLOOR TILE

#### STANDARD PALLET 105X105 cm.

		NOMINAL SIZE THICKNESS PALLET					LET			PACKING				SC	.м.			REMARKS		
PROD.	TYPE	INCH		MM.	MM.	CTN./	LAYER/	PCS/CTN.	CTN./PLT.	PCS./SQ.M.	CTN./SQ.M.	PLT./20'FCL	SQ.M./PC	SQ.M./CTN.	SQ.M./PLT.	SQ.M./20'FCL	NW/CTN.	GW/PLT.	NW/20'FCL	
						LAYER	PLT.	(PCS.)	(CTN.)	(PCS.)	(CTN.)	(PLT.)	(SQ.M.)	(SQ.M.)	(SQ.M.)	(SQ.M.)	(KGS.)	(KGS.)	(KGS.)	
ш		8x8	200	x 200	6.5±0.3	25	4	25	100	25.00	1.00	16	0.040	1.00	100.00	1,600	13.00	1,330	21,280	
≓	9	12x12	300	x 300	7.5±0.3	33	2	11	66	11.00	1.00	20	0.091	1.00	66.00	1,320	15.70	1,066	21,320	
8	E	16x16	400	x 400	8.0±0.3	40	2	6	80	6.25	1.04	15	0.160	0.96	76.80	1,152	16.30	1,334	20,010	
□ □		12x24	300	x 600	10.0±0.4	16.00	3	8	48	5.56	1.44	18	0.180	1.440	69.120	899.000	19.444	1,343	24,191	

#### PACKING SPECIFICATION: WALL TILE

#### STANDARD PALLET 105X105 cm.

		NOMINAL SIZE THICKNESS PALLET				LET			PACKING				sc	.M.			REMARKS		
PROD.	TYPE	INCH	MM.	MM.	CTN./	LAYER/	PCS./CTN.	CTN./PLT.	PCS./SQ.M.	CTN./SQ.M.	PLT./20'FCL	SQ.M./PC	SQ.M./CTN.	SQ.M./PLT.	SQ.M./20'FCL	NW/CTN.	GW/PLT.	NW/20'FCL	
					LAYER	PLT.	(PCS.)	(CTN.)	(PCS.)	(CTN.)	(PLT.)	(SQ.M.)	(SQ.M.)	(SQ.M.)	(SQ.M.)	(KGS.)	(KGS.)	(KGS.)	
		8x8	200 x 200	6.8±0.3	25	4	25	100	25.00	1.00	17	0.040	1.00	100.00	1,700	11.00	1,130	19,210	
		8x10	200 x 250	6.8±0.3	32	3	20	96	20.00	1.00	18	0.050	1.00	96.00	1,728	12.00	1,182	21,276	
	ĺ	8x12	200 x 300	6.8±0.3	40	2	16	80	16.00	1.00	23	0.060	1.00	80.00	1,840	11.27	932	21,436	
₽	9	8x16	200 x 400	9.0±0.4	20	4	12	80	12.00	1.00	17	0.080	1.00	80.00	1,360	14.93	1,224	20,808	
₩	#	8x24	200 x 600	9.0±0.4	16	4	9	64	8.33	0.93	18	0.120	1.08	69.12	1,244	17.20	1,131	20,358	
>		10x16	250 x 400	9.0±0.4	24	3	10	72	10.00	1.00	18	0.100	1.00	72.00	1,296	16.00	1,182	21,276	
	l	12x18	300 x 450	9.0±0.4	24	3	8	72	7.41	0.93	18	0.135	1.08	77.76	1,400	16.00	1,182	21,276	
		12x24	300 x 600	10.6±0.4	16	3	8	48	5.56	0.69	16	0.180	1.44	69.12	1,106	27.00	1,326	21,216	

